



 **Techniseal®**

**A FASTER & CLEANER WAY
WITH TECHNISEAL'S SYSTEM
FOR PORCELAIN PAVERS**




NextGel PORCELAIN PAVER JOINTING SAND

COLOR	CODE	WEIGHT
White Pearl	141000066	25 lbs
Black Onyx	141000065	25 lbs
Grey Moonstone	141000064	25 lbs
Beige Agate	141000067	25 lbs

**CAUTIONS SPECIFIC TO
PORCELAIN PAVERS**

- Mechanical compaction should be done until joint is saturated. Several passes may be required.
- Porcelain pavers should never be installed with a porcelain to porcelain contact.

(341-444 09/2023)

Contact your local Techniseal® representative, visit techniseal.com or dial 1 800 465-7325 for more details. 

 **Techniseal®**


**NextGel™ PORCELAIN
PAVER JOINTING SAND**

**A FASTER & CLEANER SOLUTION
FOR GROUTING PORCELAIN PAVERS**



- **INNOVATIVE
GROUT ALTERNATIVE**
- **NO MIXING
REQUIRED**
- **FAST & EASY**
- **COLOR
CONSISTENT
EFFLORESCENCE-FREE**

Residential & Commercial Use **Convenient 25 lb bag covers 100 sq. ft.** **For joints from 1/16" to 1/2"**

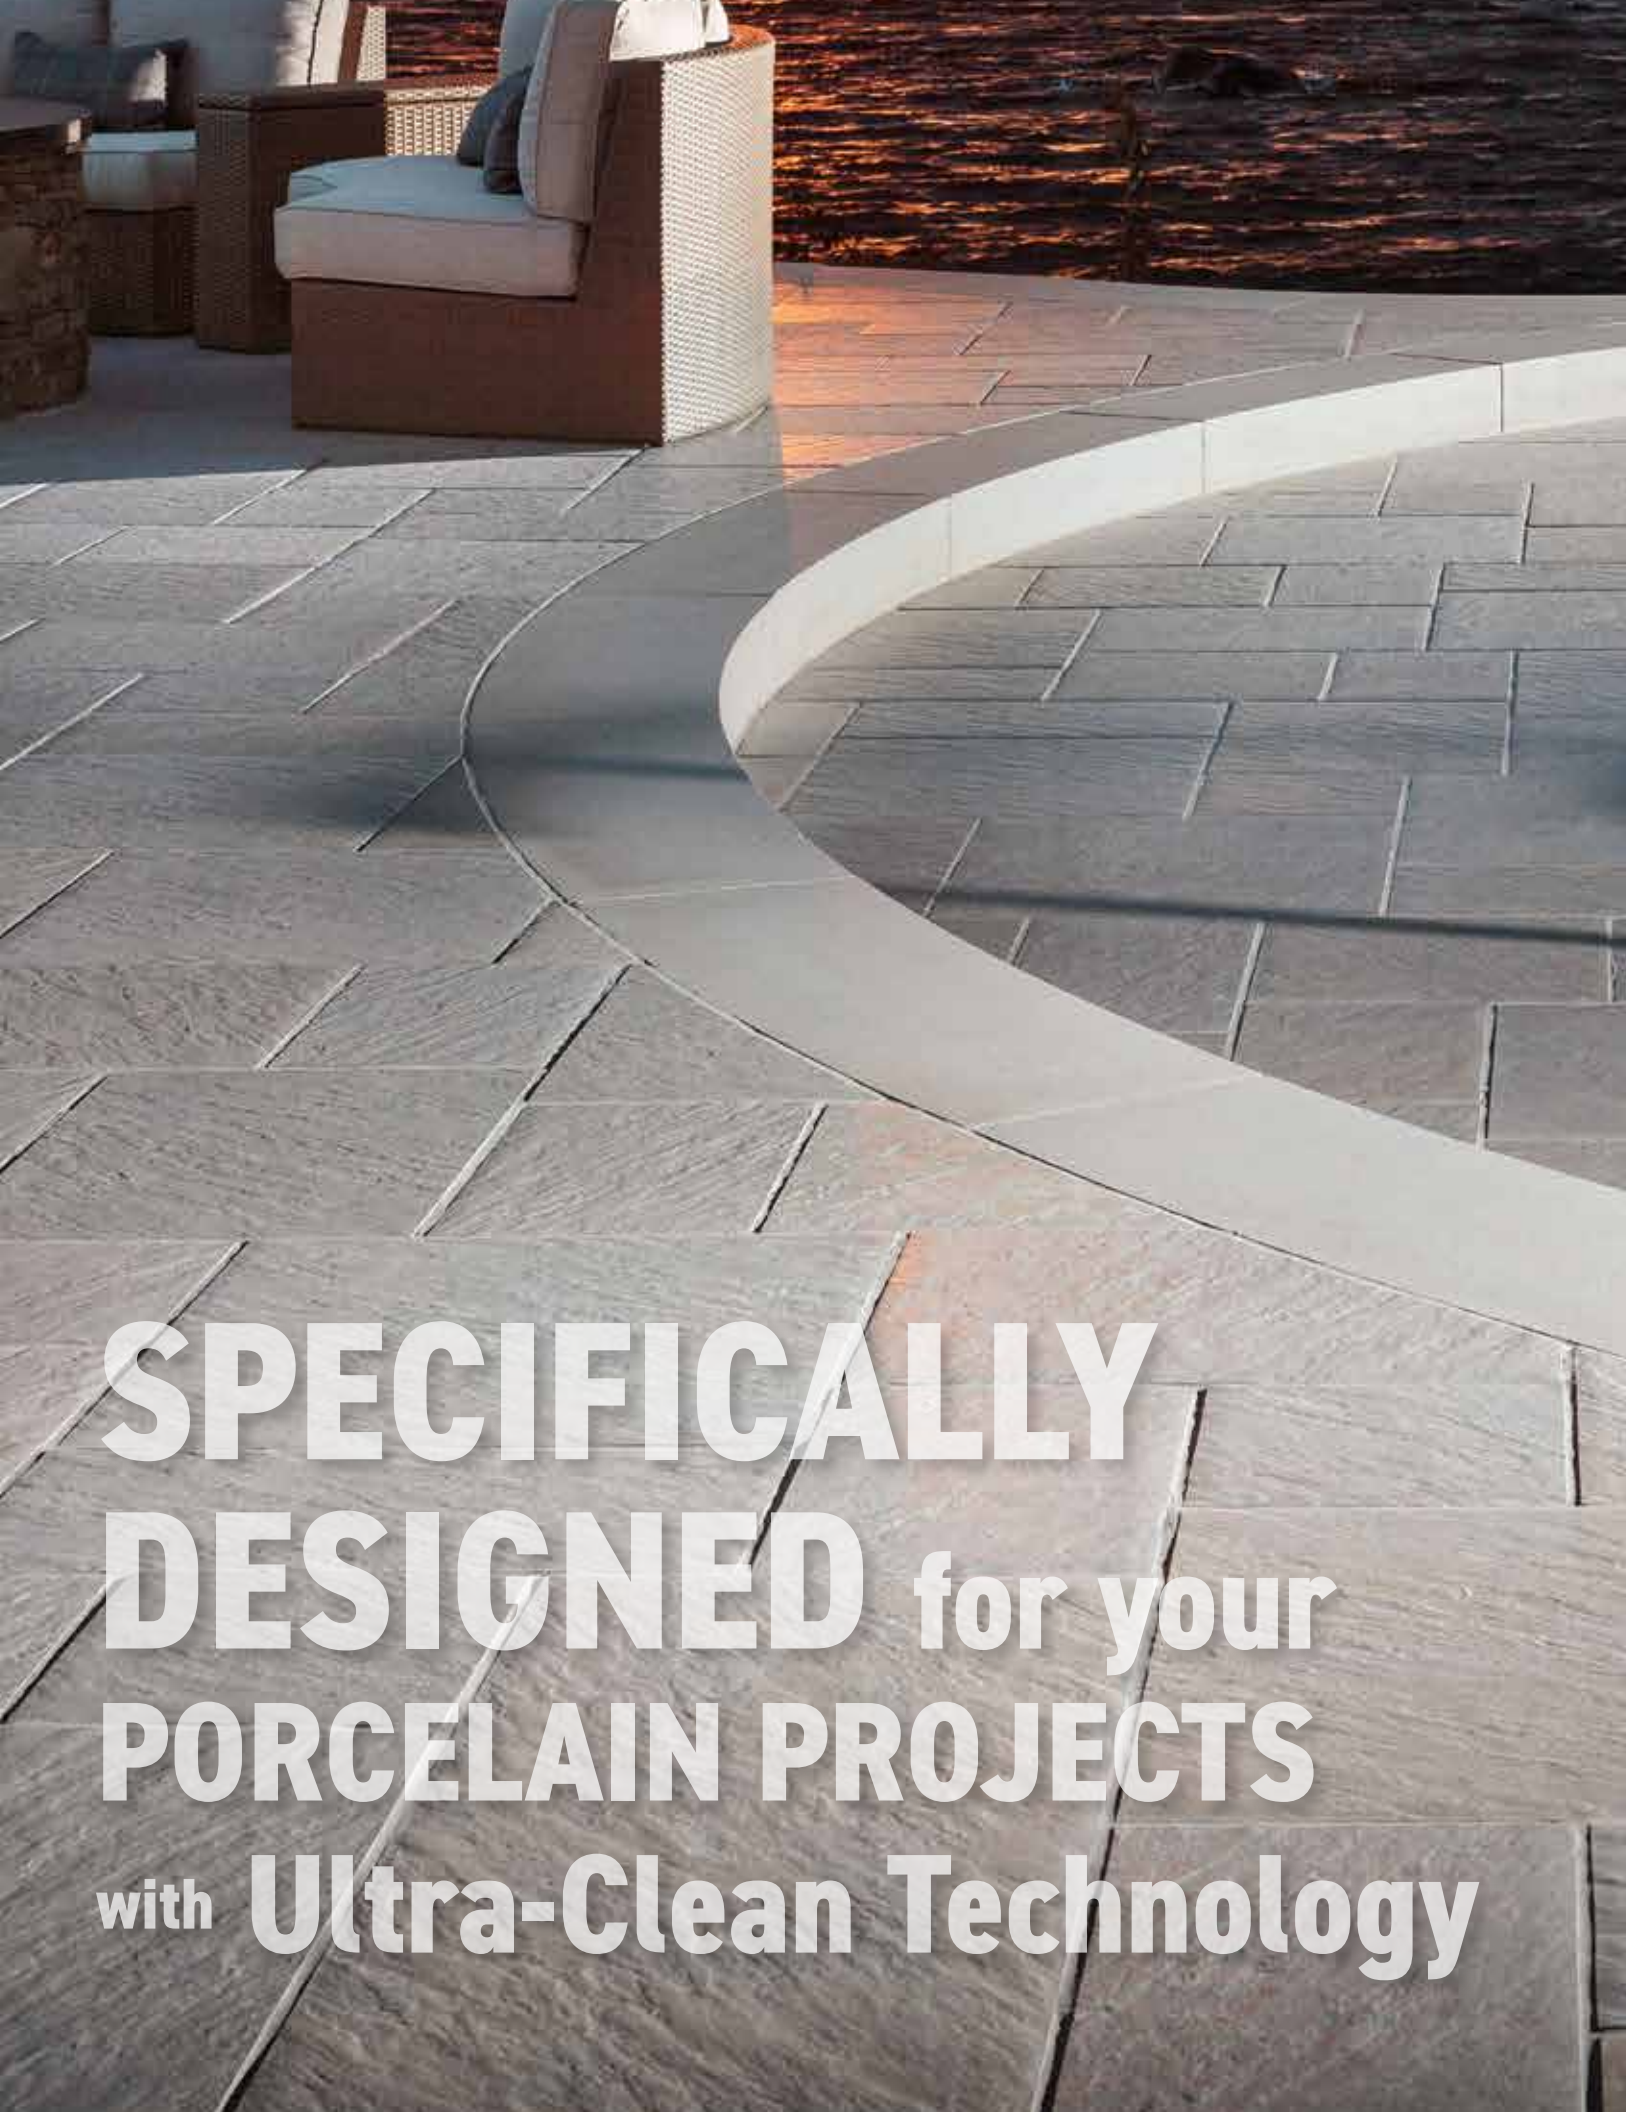

**SPECIFICALLY
DESIGNED** for your
PORCELAIN PROJECTS
with **Ultra-Clean Technology**

NextGel™ PORCELAIN PAVER JOINTING SAND



1
**SPREAD
THE SAND**

- Spread product evenly on a small surface. Using the street broom, fill joints completely. Spread sand over short distances.



2
**COMPACT
THE SAND**

- Pass the paver roller compactor over the entire surface to compact the sand.
- Add more product and spread to fill joints again.
- Pass the paver roller compactor over the entire surface a second time.
- **IMPORTANT:** Multiple passes may be required until joint saturation is reached.
- Remove excess sand from the surface with the broom.
- Level the height of the sand with the leaf blower.
- Sand level must be at least 1/8" below top of tiles.



3
**ACTIVATE
BY WATERING**

- Using the water sprayer, starting from bottom of the slope, quickly water the joints of a 100 sq. ft. section* to set the sand (10 to 15 seconds).
- Immediately wet the same section where joints have absorbed more water.
- Check for water accumulation at the surface of the jointing sand as a cue to stop watering. Wait until there is no free water at the surface of the joint and verify the depth of activation.




If NextGel™ PORCELAIN PAVER JOINTING SAND is activated at 75% or more of its depth stop watering. If activated at less than 75%, water for an additional 5 seconds and check again after 30 seconds.


*NextGel™ PORCELAIN PAVER JOINTING SAND is fast to activate. It is very easy to overwater installations with large tiles. Carefully track the watering time during the activation process.




AVAILABLE IN:



White
Pearl



Black
Onyx



Grey
Moonstone



Beige
Agate

